



LIGHTING & ELECTRONIC DESIGN

PART #: T-XXXX-XXXXX-X-X

Catalog #		Type
Projects		
Comments		Date
Prepared By		

LED **POWER SUPPLIES SERIES™** Class II transformers have circuit breaker protection up to 5 amps per circuit. They must be isolation type transformers, and be labeled for use with lighting products. Class II products require conduit from the secondary side of the transformer to the lighting product.




**FEATURES:**

- Economical Design
- Available in 60W, 75W, 100W circuit configurations
- Available with 12VAC or 24VAC output

**APPLICATIONS:**


- Theaters
- Restaurants & Bars
- Arenas
- Auditoriums
- Hotels
- Casinos

**DIAGRAMS:**

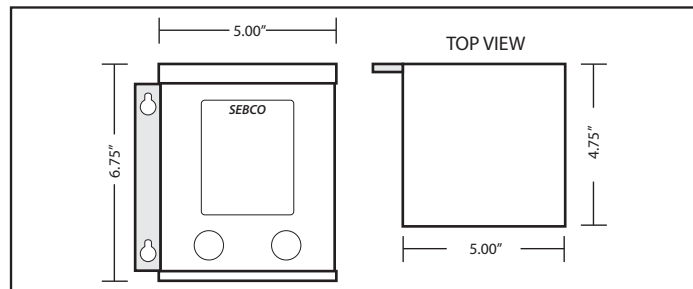

PART NUMBER	Rated Watts	Primary Voltage	Output Voltage	Breakers	Frequency	Dimensions	Weight
T-1107-12-25	100W	120VAC-1.3A MAX	12VAC-5A MAX	2 @ 5Amps	60 Hz	6.75" x 5" x 4.75"	10 lbs.
T-1108-12-35	150W	120VAC-1.3A MAX	12VAC-5A MAX	3 @ 5Amps	60 Hz	6.75" x 5" x 4.75"	10 lbs.
T-1109-12-45	250W	120VAC-1.3A MAX	12VAC-5A MAX	4 @ 5Amps	60 Hz	6.75" x 5" x 4.75"	13 lbs.

**Ordering Information:**

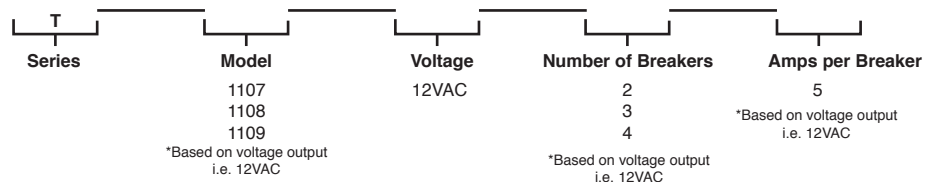

Ordering Example: T-1107-12VAC-2-5