



Catalog #		Type
Projects		
Comments		Date
Prepared By		

LED's **COVE LUX SERIES™** is a high output, low energy, long life alternative to Xenon and Incandescent cove, under counter, and showcase lighting systems. Utilizing high output, 1 and 2 watt thermally engineered LEDs, Cove Lux achieves a lumen output equivalent to 5W Xenon bulbs, making it a viable option for locations with high ambient light. With reduced consumption of over 14 watts per foot, your savings add up rapidly! Along with a rainbow of colors including warm white, low maintenance and up to 100,000 hour lamp life, Cove Lux will become your product of choice. Available in dimmable and standard (non-dimmable) configurations, Cove Lux operates at 24VAC with a current controlled circuit.

The **COVE LUX SERIES™** operates at 24VAC as a cove, under counter, or showcase lighting system. Thermally engineered LEDs are mounted in series with the ability to run up to 100 watts per circuit. The circuit is current controlled to keep light output even from the beginning to the end of the run. An aluminum channel provides a wireway for additional circuits, as well as a heat sink for the LEDs. Circuit do not exceed 4 amps per NEC Class II regulations.

Order **COVE LUX SERIES™** (Dimmable) configurations using CLD-prefix!

Order **COVE LUX SERIES™** (Non-Dimmable) configurations using CLS-prefix!

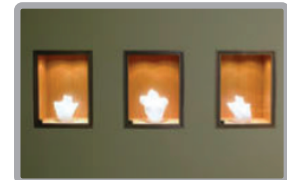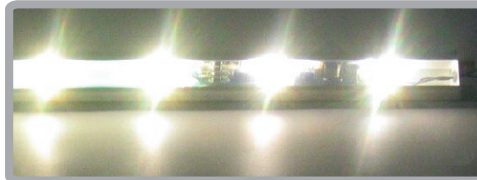


FEATURES:

- High output LEDs 1 watt or 2 watt
- Long life LEDs up to 100,000 hours
- Even illumination with current control
- No scaling
- Available in dimmable and non-dimmable
- Operates in 24VAC
- ETL listed

APPLICATIONS:

- Theaters
- Restaurants & Bars
- Cove and Undercounter Lighting
- Display and Jewelry Cases
- Auditoriums
- Hotels
- Casinos

DIAGRAMS:

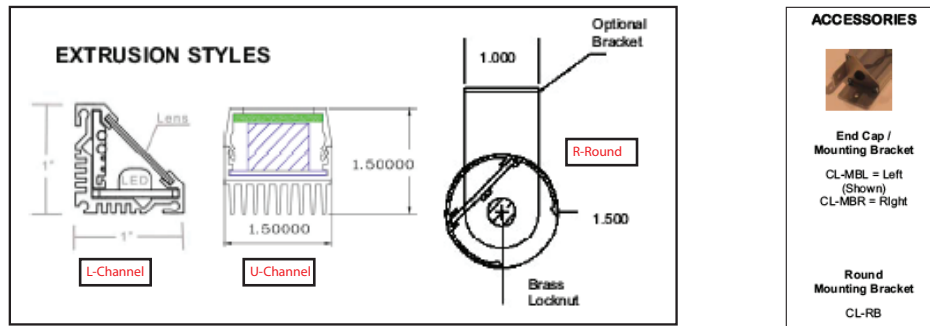

Ordering Information:

CLD CLS	Spacing 3" O/C <small>*Custom Spacing Available</small>	Led Watt 1W (1 Watt) 2W (2 Watts)	Color A (Amber) B (Blue) G (Green) O (Orange) R (Red) W (White) WW (Warm White) <small>*Custom Colors Available</small>	Channel Style L (Channel) U (Channel) R (Round)	Length Linear Feet Required <small>*Custom Length Available</small>	Dimmable D (Dimmable)
------------	---	---	---	--	--	--------------------------

Ordering Example: CLD-03-1W-WW-L-20-D

