



LED Flexible Listel (Super Bright Ø5 LED) (Single Color) (Low Voltage) (Outdoor)


■ FLF-99-1M-12V

Minimum workable unit is 33pcs LED

LED Flexible Listel is an energy efficient, flexible, copper core silicone coated, single color, low voltage, LED linear signage channel illumination solution.

LED Flexible Listel comes in single color ((WLED) White, Red, Green, Blue, and Yellow. ø5 Super Bright LEDs. LED Flexible Listel enables you to mix and match LED colors to produce a static multi-color effect. The flexible silicone coated copper core design enables both flexibility and an IP44 rating for outdoor application. The silicone cover also increases heat dissipation.

LED Flexible Listel is easy to install in linear or curved channel and complex channel applications using the specially designed mounting clips. The LED Channel Flex 3W mounting clips can be glued, screwed or affixed with double sided adhesive tape.

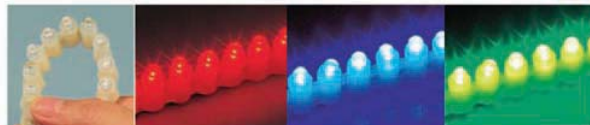

Specifications

Item No.	LED-FLF-99-1M-R	LED-FLF-99-1M-Y	LED-FLF-99-1M-G	LED-FLF-99-1M-B	LED-FLF-99-1M-W
Light Source	ø5 Super Bright LEDs	ø5 Super Bright LEDs	ø5 Super Bright LEDs	ø5 Super Bright LEDs	ø5 Super Bright LEDs
Color of LED	R	Y	G	B	W
LED Qty/Unit	33	33	33	33	33
Input Voltage	12V DC	12V DC	12V DC	12V DC	12V DC
Lumens/ unit	62.1	70.2	123	46.7	346.9
Power Consumption	7.92W	7.92W	7.92W	7.92W	7.92W
Current/Unit	600mA	600mA	600mA	600mA	600mA
Dimension	1x7.6x12mm	1x7.6x12mm	1x7.6x12mm	1x7.6x12mm	1x7.6x12mm
Max units with 12V 2.5A switch power	3	3	3	3	3
IP rating	IP44	IP44	IP44	IP44	IP44



141 Cassia Way STE. C
Henderson, NV 89014
Ph. 702.568.8742 * 800.700.5483
Fax 702.568.8753
www.LEDLINC.com

This fixture must be installed by a qualified electrician. **LED** is not responsible if its fixture are not installed according to local safety standards. Please leave a copy of these instructions for the person responsible for the maintenance of the installation.

