


Catalog #		Type
Projects		
Comments		Date
Prepared By		

LED **POWER SUPPLIES SERIES™** Terminal Dry are regulated and switched and meant for dry locations only. They are hardwired in, rather than plugged. Check local codes for suitability. These power supplies can use input from 120 VAC to 240 VAC at 50 or 60 Hz. These Power supplies have regulated outputs and are not suited for dimming applications

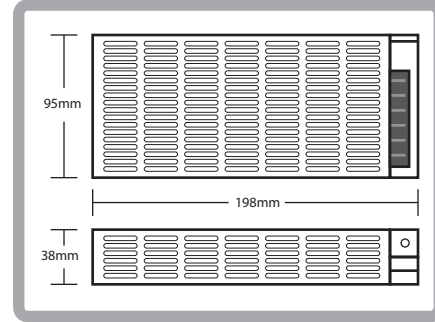

**FEATURES:**

- Terminal Wiring
- LED ON indicator
- 120-240 VAC
- 50 / 60 Hz
- Regulated
- Not Class II


**APPLICATIONS:**

- Theaters
- Restaurants & Bars
- Arenas
- Auditoriums
- Hotels
- Casinos

DIAGRAMS:

Part #	Input VAC	Hertz	Output VDC	Watts	Dimensions L x W x H (MM)	Weight
FS -10012 -1M	120-240	50-60	12	100	198 x 95 x 38	0.59 kg
FS -10024 -1M	120-240	50-60	24	100	198 x 95 x 38	0.59 kg

Ordering Information:

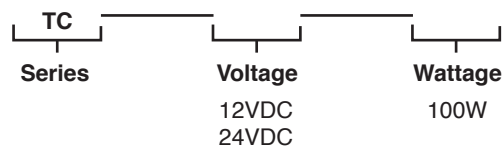

Ordering Example: TC-12VDC-100